


Product Parts

- 1 - Frame
- 2 - Snap Edge
- 3 - Protective Graphic Film
- 4 - Power Cord
- 5 - Wall Mount Hardware
 - 5a - Hanger (x2)
 - 5b - Bolt (x2)
 - 5c - Lock Nut (x2)
- 6 - Threaded Glider (x8)

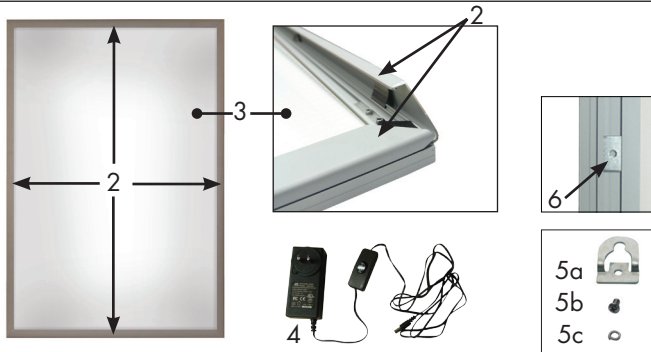

Display Set-Up


Step 1

Remove parts from packaging and place on a clean surface. Open Snap Edges (2) on all four sides.



Step 2

Lay the Graphic evenly inside the Frame (1). Place the Protective Graphic Film (4) on top of the Graphic. Close all 4 Snap Edges (2).

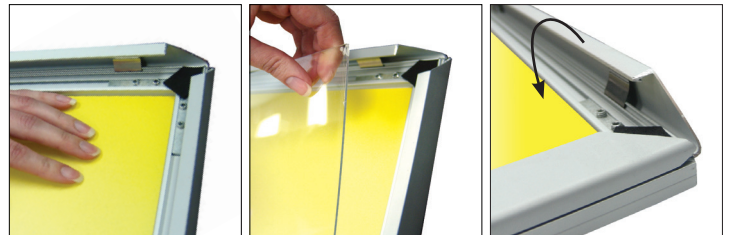

Step 3

Connect Power Cord (4) to the cord located on the back of your Frame (1). Plug into outlet. Use the switch on the Power Cord (4) to turn your display on and off.



Step 4

To attach Wall Mounting Hardware (5) select the Threaded Glider(s) on the back of your Frame (1). Set the Hanger (5a) on top of the Glider (6) aligning the threaded holes. Place a Lock Nut (5c) onto the Bolt (5b) and thread it through the Hanger (5a) and the Glider (6). Slide the Glider were desired and tighten with a screw driver.



Storage

Store in a cool dry location.

Care

To clean, wipe with damp cloth.